


HKS manufaktur deluxe 15 mm, oak

Type/Construction	engineered oak plankwood flooring in 2 layer construction, approx. 4 mm oak top layer, based on birch plywood, WBP glued (Herringbone and Chevron patterns are possible)
Dimensions	Thickness: 15/4 and 21/6 mm // Width: 140 / 190 / 220 / 250 mm
Lengths	mainly lengths 1.800 – 2.480 mm, only one length per bundle, 7 layers per bundle; 5 full lengths, 2 layers 1 time broken (min. length 600 mm)
Packaging	shrinking foil, end cap, maintenance and installing instructions included
Profile	tongue and groove and bevel all around (GO4)
Surfaces	bespoke finishes according to agreement, e. g. brushed, heavy structured, burned/flamed, smoked, sawned, handcrafted, hand-sanded, wooden nails, planed, stained, unfinished, natural/coloured/invisible oiled
Production	according to EN 13489
Grading*	ABCD / Rustic - according to quality description of manufacturer. Within this grade it is allowed: <ul style="list-style-type: none"> - filled partial open knots - Cracks along or across the grain, surface cracks partially filled - Colour differences, brown heart, pith rays, Sapwood - all wood type specific characteristics AB grade - on demand
Installation	glueing down on concrete or floating installation on Elastilon, always according to the instructions of the manufacturer (glue, Elastilon, etc.)
Maintenance	depending on use with suitable maintenance products
Underfloor heating	only warm water system, no electric heating systems, surface temperature max. 29° C with equal heating Thermal insulation resistance: 0,088 m ² K/W, 0,17 W(m K)
Fire resistance	D _{fl} -s1 (normally inflammable)
Labelling	CE
Hints	Manufaktur deluxe is a custom made production. Every plank is unique. Every lot is individual. Colour differences to samples may occur. It highlights the distinctive character and the authenticity of this flooring. Please project always enough cutting scrap. Differences of +5% amount must be accepted.

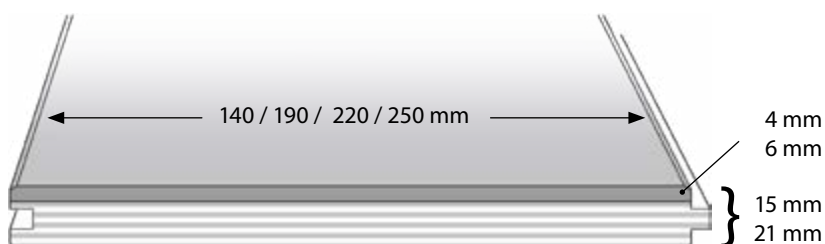

*According to the factory standard, 3% clause to EN standard, max. 3% of the complete delivery including the cutting differences can differ from the grading description. The material must be checked before installation, claims after the installation are impossible.